




38422 LEATHER & VINYL REPAIR COMPOUND

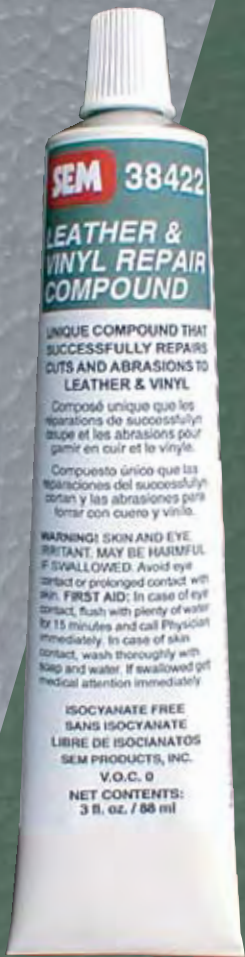


BEFORE

For Dependable Repairs!



CLEAN

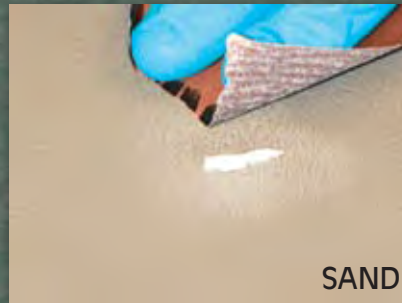

SAND



FILL



AFTER

- EXCELLENT STRENGTH
- SUPERIOR ADHESION AND FLEXIBILITY
- EASY TO USE AND AFFORDABLE
- ECONOMICAL PACKAGING CREATES LESS WASTE
- RELIABLE REPAIR



38422

LEATHER & VINYL REPAIR COMPOUND

38422 is a unique product that offers superior strength and flexibility while repairing cuts and tears on leather and vinyl. **38422** may also be used to fill minor imperfections.

APPLICATION:

1. With a gray scuff pad, clean the area with **39362 SEM SOAP**. Then, rinse with water and dry. When cleaning leather do not rinse with water. Instead, wipe with a clean damp towel.
- 2a. For leather repairs, clean the area thoroughly with **3835() PLASTIC/LEATHER PREP** and dry.
- 2b. For vinyl repairs, clean with **3834() VINYL PREP** using a gray scuff pad. Rinse with water and dry.
3. If needed, trim away the cracked edge with a razor blade.
4. Sand around the repair area with 400 or 500 grit sand paper, blow off and clean again with **3835() PLASTIC/LEATHER PREP**. For vinyl, use **3834() VINYL PREP**.
5. Apply a thin layer of **38422** to the backing fabric, heat around the edges and press lightly with a cold block.
6. Next, apply **38422** over the repair area. Using a low heat gun, hold the gun 6 to 8 inches away for 1 minute or until the compound turns clear.
7. Place one of the **70022 INTERIOR GRAINING PADS** over the repair area and apply pressure to the area with a cold block.
8. Sand down the high area or refill the repair area if needed.



The Right Choice

SEM PRODUCTS, INC. · 651 Michael Wylie Dr. · Charlotte, NC 28217-1546

704-522-1006 · 800-831-1122

www.sem.ws